




Specifications

Designed for use on systems using both high or low cylinder pressure high purity (up to grade 6.0) gases, the Spec-Master nickel plated brass Manual Cylinder Manifolds are supplied complete with a pressure reduction package that offers a compact, easy to install manifold system complying with current standards and also BCGA Codes of Practice.

Product Features

- Multi-stage or single stage primary pressure regulator
- High pressure diaphragm isolation valves
- High pressure diaphragm purge/vent valves
- High pressure non-return valves
- CE marked pipeline pressure relief valve
- Pipeline diaphragm isolation valve
- Stainless steel high pressure flexible hoses to BS EN ISO 14113
- Stainless steel wall mounting frame
- Stainless steel wall mounted cylinder support rack with restraint chains
- Spec-Master products are clean room assembled, undergo 100% Helium leak testing and are vacuum packed
- Designed and manufactured in Norfolk, UK.

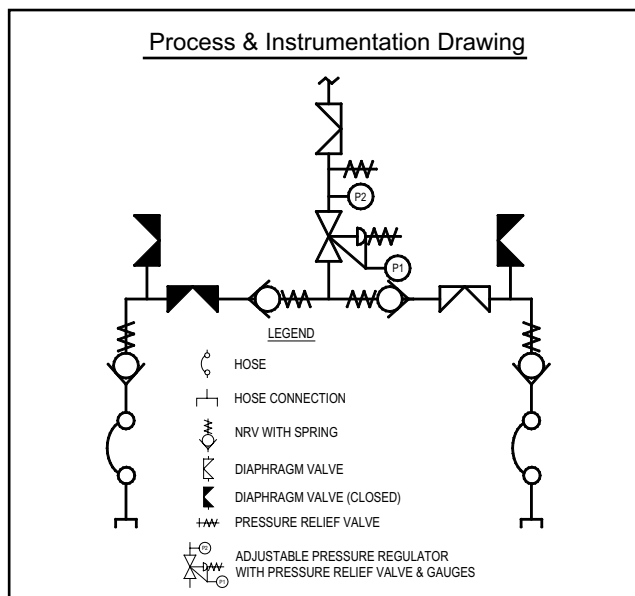

LIT01060 Issue: A Revision: 1

Technical Data

Type	Single and 2 x 1 cylinder
Regulator	Multi-stage or Single-stage
Inlet Pressure	maximum 300 bar
Outlet Pressure	0-1.5, 0-3.5, 0-10 bar
Inlet Connection	BS341, DIN or CGA
Outlet Connection	1/4" NPT female
Materials:	
Body: Regulator & Valves	Nickel plated brass
Valve seat: Regulator	Nylon
Diaphragm: Regulator & Valves	316L Stainless steel
Filter: Regulator	sintered 316L Stainless steel
Helium Leak Integrity	1x10 ⁻⁹ mbar l/s
Gas purity	grade 6.0 (99.9999%)
Temperature range	-20° C to +60° C
Dimensions	width: 255mm
	height: 355mm
	depth: 190mm